

# Hadar 7110

Hadar 7110

For irrigation, propagation and micro-climate

## Applications

- Horticulture and viticulture
- Orchards
- Greenhouses and Nurseries
- Nurseries and landscapes

## Structure and features

- Bayonet coupling
- Modular construction for simple use and modification
- Wide range of wetted patterns with 9 different inserts
- 11 color-coded nozzles with flow rates from 23-333 l/h
- Excellent water distribution
- Leakage Prevention Device (LPD)



## Technical data

Recommended working pressure: 1.5-3.0 bar

Wetted diameter: 1.7-11.0 m


### Filtration requirements:

for nozzle 0.8-1.2 mm - 130 microns (120 mesh)

for nozzle 1.3 mm or more - 200 microns  
(80 mesh)

# Hadar 7110

Wetted diameter (m) at 2.0 bar

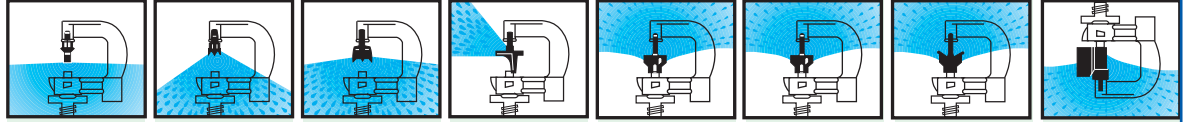

Wetted diameter (m)

Nozzle size mm	Nozzle color	Flow rate (l/h)	Mist sprayer	Small sprayer	Extra-range and insect-resistant sprayer	Half-circle (180°) sprayer	Mini-range rotor 40L	Medium-range rotor	Extra-range rotor	Inverted rotor*
0.8	Black	33	2.0	2.2						
0.9	Grey	41	2.1	2.3	2.4		6.0			
1.0	Purple	50	2.3	2.4	3.0			6.6		8.4
1.1	Red	61	2.4	2.6	3.2			7.0		8.5
1.2	Orange	75	2.6	2.8	3.6			7.5		9.0
1.3	Green	87	3.0	2.9	3.6	3.0		8.5		9.5
1.4	Blue	103	3.3	3.1	3.6	3.1			9.4	10.0
1.6	Yellow	128	3.6	3.0	3.7	3.3			9.6	10.2
1.8	Bright Green	166	4.1	3.0	3.8	3.4			10.2	10.6
2.0	White	199	4.4	3.2	3.9	3.5			10.4	11.0
2.3	Brown	265	5.4		4.2	3.7			10.6	

\*Tested at 2.0 m above ground

Performance table 7110 Inverted rotor at 2 bar pressure

Nozzle mm	Nozzle color	Flow rate (l/h)	Diameter (m)	Precipitation (mm/h)						Spacing (m)		
				3x3	3x4	3x5	4x4	4x5	4x6	5x5	5x6	6x6
1.3	Green	87	9.5	8.9	6.7	5.3	5.0	4.0			3.2	
1.4	Blue	103	10.0	6.4	5.1	4.9	4.3	4.1			3.6	
1.6	Yellow	128	10.2	7.4	6.0	5.7	5.0	4.8	5.0	4.3	4.0	3.3
1.8	Bright green	166	10.6	9.0	7.2	6.9	6.0	5.8	6.0	5.1	4.8	4.0
2.0	White	199	11.0	10.5	8.4	8.0	7.0	6.7	7.0	6.0	5.6	4.7

Tested at 2.0 m above ground

Color code - Distribution uniformity

CU < 85%    
  CU = 85-88%    
  CU = 89-92%    
  CU > 93%

## Mist sprayer for propagation

Spacing on line: 1.0 m

Spacing between laterals: two laterals for 1.4-1.6 m table width

Single lateral for 1.2 m table width

Recommended working pressure: 2.5-4.0 bar

## 7110/98 Inverted rotor with LPD



## 7110 mist sprayer 4.0 mm inserted base



Leakage Prevention Device (Super LPD)