

Super 10



IrriStand systems

Extra-range, ball-driven
sprinkler mounted on IrriStand
52

Applications: field crops, greenhouses,
residential and landscaping
For extra-range spacing up to 12 m

- Compact, sturdy, closed and protected ball engine
- Bayonet nozzle for easy service
- Optional Flow Regulator (F.R.)
- High water distribution
- Brown nozzle for road protector only

Super10 Performance Table


Precipitation rates (mm/hr) and uniformity (CU) at various spacing

Nozzle Color	P (bar)	Q (l/h)	D (m)	Precipitation rates (mm/hr) Spacing (m)					
				9x9	9x10	10x10	9x12	10x12	12x12
Blue	2.5	360	18	4.5	4.0	3.6			
	3.0	395	17.5	4.9	4.4	3.9			
	3.5	425	17	5.3	4.8	4.3			
	4.0	455	17	5.6	5.1	4.6			
F.R.	3.0-5.0	360	18	4.5	4.1	3.7			
Yellow	2.5	450	20	5.7	5.1	4.6	4.3	3.8	3.2
	3.0	495	20	6.1	5.5	4.9	4.6	4.1	3.4
	3.5	530	20	6.6	5.9	5.3	4.9	4.4	3.7
	4.0	570	20	7.1	6.4	5.7	5.3	4.8	4.0
F.R.	3.0-5.0	450	20	5.5	5.0	4.5	4.2	3.7	3.1
Green	2.5	550	20	6.7	6.0	5.4	5.0	4.5	3.8
	3.0	600	20	7.4	6.7	6.0	5.5	5.0	4.2
	3.5	650	20	8.0	7.2	6.5	6.0	5.4	4.5
	4.0	695	20	8.6	7.8	7.0	6.5	5.8	4.8
F.R.	3.0-5.0	550	20	6.9	6.2	5.6	5.2	4.3	3.9
Red	2.5	670	21	8.3	7.4	6.7	6.2	5.6	4.6
	3.0	735	21	9.0	8.1	7.3	6.8	6.1	5.1
	3.5	790	21	9.6	8.7	7.8	7.2	6.5	5.4
	4.0	850	21	10.5	9.4	8.5	7.9	7.1	5.9
F.R.	3.0-5.0	670	21	8.3	7.5	6.7	6.2	5.6	4.7

Color code - Distribution uniformity CU < 85% CU 85-88% CU 88-92% CU > 92%

F.R. = Flow Regulator



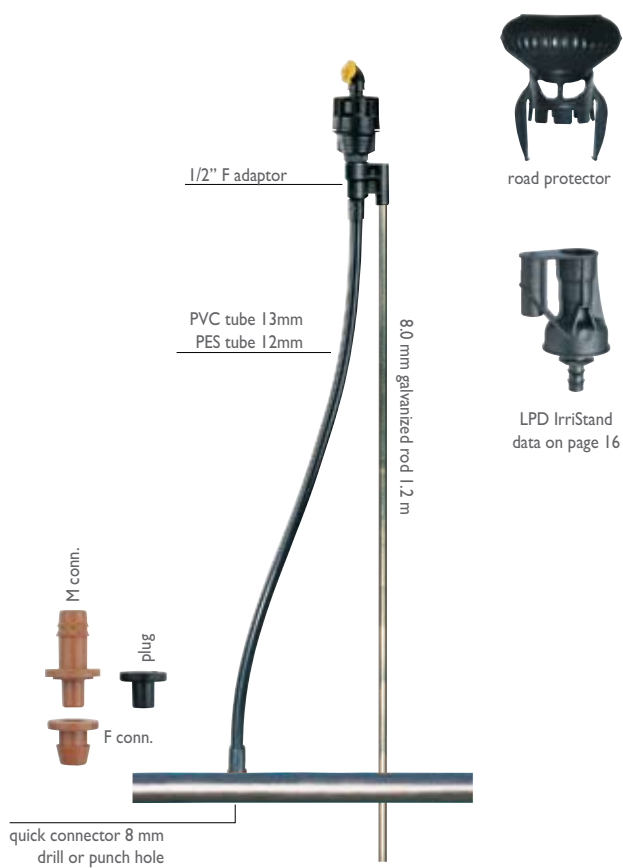

Brown nozzle for Road Protector only

Nozzle Color	P (bar)	Q (l/h)	D (m)
Brown*	2.5	320	19
	3.0	350	19
	3.5	380	19
	4.0	405	19
F.R.	3.0-5.0	320	19

